


Key Features

- **Fast Warm Boot** eliminates long startup delays, launching signage and content in under 7 seconds.
- **Native 4K UHD in Any Orientation** delivers sharp, high-resolution visuals in landscape or portrait.
- **USB media playback & scheduling with automatic failover** ensures uninterrupted signage
- **Commercial-Grade Brightness & 24/7 Reliability** keep content clear and visible around the clock.
- **Centralized control** with Pro-AV integration and remote management via Web UI and ViewSonic Manager.

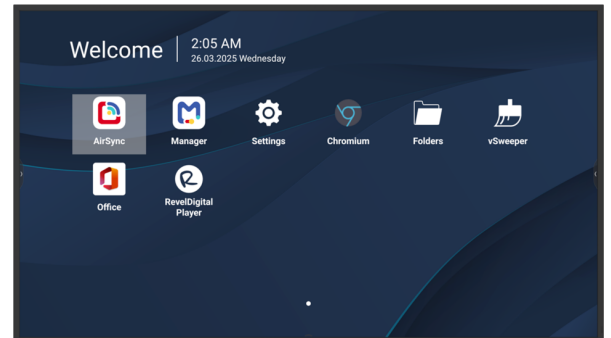

Product Description

Visit Us www.viewsonic.com

DISPLAY

Panel Size:	43"
Type/ Tech:	TFT LCD module with DLED backlight
Display Area (mm):	941.184(H) x 529.416(V) 42.5" diagonal
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	8bit+2bitFRC
Brightness:	500 nits
Contrast Ratio:	1200:1 (typ.) / 2000:1 (DCR enabled)
Response Time:	6.5ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours
Surface Treatment:	Hardness: 3H, Anti-glare coating, Haze 25%
Bezel:	9.9/9.9/9.9/9.9 mm (L/R/T/B)
Orientation:	Landscape & Portrait

PLATFORM

Processor:	Quad-core ARM Cortex-A73
RAM:	8GB DDR4
Storage:	32GB

INPUT

HDMI:	x3 (HDMI 2.0*3, HDMI1 support ARC)
Audio:	3.5mm x1
RS-232:	x 1
WiFi Slot:	x 1

OUTPUT

HDMI:	X 1
Audio:	3.5mm x1 (Line out)
SPDIF:	x 1

LAN

RJ45:	x 2 (*1 LAN-in & *1 LAN-out) 10/100M for USB TypeC, 1000M for OPS
-------	--

USB

Type A:	x 2 (USB2.0 x1, USB3.2 Gen1 x1)
Type C:	x 1 (PD65W/15W with OPS + DP1.2 + Data USB2.0 + 10M/100M sharing)

SPEAKERS

16W x 2

COMPATIBILITY

HDMI:	3840X2160 @60Hz
-------	-----------------

EMBEDDED OS

Android 14 AOSP

BUNDLED SOFTWARE

Wireless Presentation:	AirSync
Device Management:	Manager
ViewSonic Launcher:	Yes

POWER

Voltage:	100-240 VAC +/- 10%
Consumption:	52.6W (44.58W with Energy Star)

ERGONOMICS

Wall Mount (VESA®):	200x200 mm
---------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% RH non-condensing

OPERATING HOURS

7/24

DIMENSIONS (W X H X D)

Physical (inch / mm):	37.98 x 21.75 x 2.44 in/ 964.6 x 552.5 x 62 mm
Packaging (inch / mm):	41.57 x 24.88 x 6.14 in/ 1056 x 632 x 156 mm

WEIGHT

Net (lb / kg):	20.06lb / 9.1kg
Gross (lb / kg):	28.75lb / 13.04kg

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8, EPEAT Gold, EEI,, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, LBL, flicker, free, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing, waste, CA65 DoC
--

PACKAGE CONTENTS

1. 3m power cord by ship area
2. Remote control
3. AAA battery x 2
4. Quick Start Guide
5. RS232 adapter
6. Clamp x 5
7. wall mount Screw x 4
8. HDMI cable 3m(HDMI LA certified)
9. Compliance statement