


Multicast UHD Receiver with Dante®

Description

Our UHD Multicast distribution platform allows virtually latency free (1 frame) distribution of HDMI video over a 1Gb Network.

The IP250UHD-RX is an industry leading 4K HDCP 2.2 HDMI video scaling receiver that using visually lossless compression technology delivers HDMI, bi-directional IR, RS-232 & USB / KVM up to lengths of 100m over standard network architecture, or greater distances using the in-built Fibre SFP port.


The IP250UHD-RX features dual RJ45 network ports for independent or combined HDMI and / or Dante® signal distribution. The unit can be powered via PoE from the network switch or locally should the switch not support PoE. With multiple configuration options available, the Multicast solution is ideal for both commercial and residential installations.

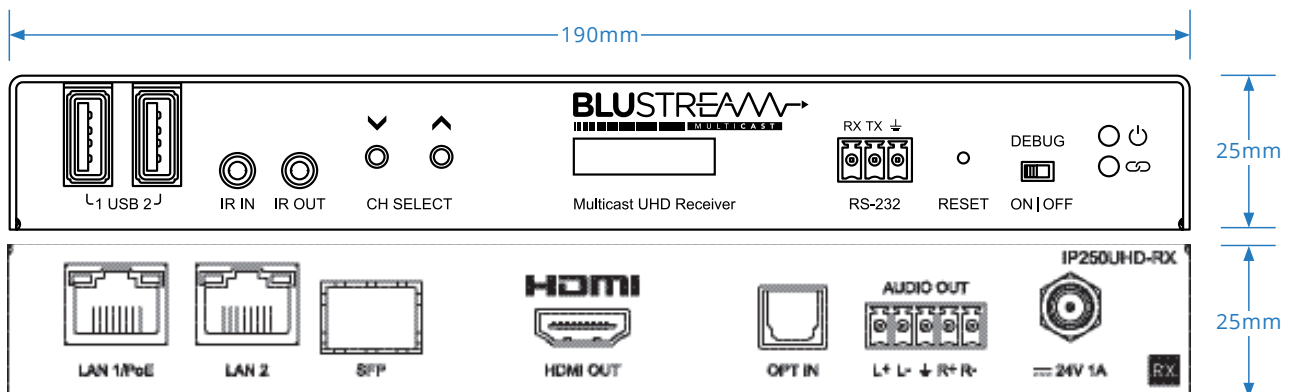

Key Features

- Advanced UHD video over 1Gb Network
- Virtually unlimited system size
- Extends HDMI and Dante up to a distance of 100m over a single CAT cable
- Dual RJ45 network ports configurable for independent or combined HDMI and Dante signal distribution
- SFP port for independent or combined HDMI and Dante signal distribution over a single fibre cable
- Video up-scaling and down-scaling
- Supports up to 4K 30Hz UHD video output
- In-built 2ch Dante transmitter for breakout of audio from HDMI source or local analogue audio input
- In-built 2ch Dante receiver for embedding of audio onto the HDMI signal or breakout to local analogue audio output
- Optical (S/PDIF) audio input for conversion of digital audio format onto Dante audio system
- Analogue L/R audio outputs support both balanced and unbalanced audio signals
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission
- Advanced signal management for independent routing of IR, RS-232, USB/KVM, audio and video
- OLED front panel display for advanced system information and manual configuration
- PoE (Power over Ethernet) to power Blustream products from PoE switch
- HDCP 2.2 compliant with advanced EDID management
- Local 24V 1A power supply should Ethernet switch not support PoE (not included)
- Features 4 operational modes:
 - Matrix distribution (requires 1Gb network switch)
 - Video wall (requires 1Gb network switch)
 - One-to-one HDMI extender (no network switch required)
 - One-to-many HDMI extender (no network switch required)

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.

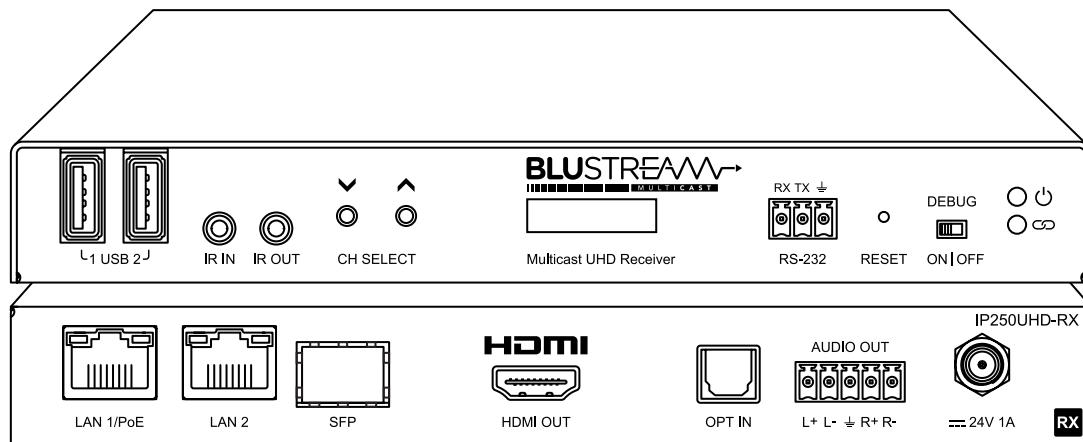

Connectivity

- **Video Input:** 1 x LAN RJ45 connector
- **Video Output:** 1 x HDMI Type A, female
- **Audio Input:** 1 x Optical (S/PDIF)
- **Audio Output Connectors:** 1 x 5-pin Phoenix connector
- **Ethernet Port:** 2 x LAN RJ45 connector
- **Fibre Port:** 1 x SFP connector (fibre module not supplied)
- **RS-232 Serial Port:** 1 x 3-pin Phoenix connector
- **USB / KVM Port:** 2 x USB-Type A
- **IR Input:** 1 x 3.5mm stereo jack
- **IR Output:** 1 x 3.5mm mono jack
- **Firmware Update:** 1 x Micro-USB

Specifications

- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature :** -4°F to 140°F (-20°C to 60°C)
- **Dimensions (W x D x H):** 190mm x 126mm x 25mm
- **PoE draw:** 8.0W (typical), 9.2W (max load)

Included Accessories

IR Accessories	1 x IRR, 1 x IRE, 1 x DB9
Rack Mount	1 x Mounting Kit

Control

App
RS-232
IR
TCP/IP

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.